


SPECIFICATIONS

Identity No.	L04025DPB
Capacity	4,000W / 2,500W
Lamp Blub Voltage	200V / 115V
UV Protective Lens	Ø645mm
Lamp Type	HMI 4000W/SE or HMI 2500W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	160 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	10 m / 8 m
Min. Distance to Flammable Object	1.2 m / 1 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	51 kg




L04025DPB


ACCESSORIES

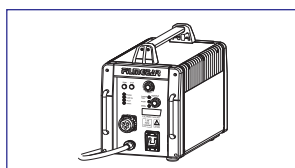

Electronic Ballast 4kW / 2.5kW

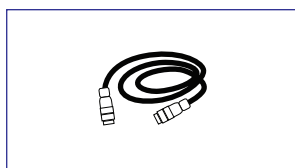

Head to Ballast Cable (7m or 15m)



Ø741 Scrims with Bag



Transport Case


LAMPHEAD CONTENTS

Lamp Housing with

- High Reflective Parabolic Glass Mirror
 - Inlet Cable with Multi-Pin Connector
 - Stirrup with Ø28mm Spigot
- # Exclude Lamp Bulb

DIMENSIONS (mm)

PHOTOMETRIC DATA

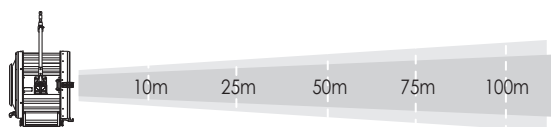

4kW						
Spot	Lux	151470	24240	6060	2690	1520
	Beam Ø	0.61 m	0.61 m	0.61 m	0.61 m	0.61 m
Flood	Lux	19920	3190	800	350	200
	Beam Ø	2.40 m	6 m	12.01 m	18.01 m	24.02 m

