

Power Beam


DAYLIGHT

4kW/2.5kW Junior

FILMGEAR

SPECIFICATIONS

Identity No.	L04025DPBJ
Capacity	4,000W / 2,500W
Lamp Blub Voltage	200V / 115V
UV Protective Lens	Ø500mm
Lamp Type	HMI 4000W/SE or HMI 2500W/SE
Color Temp.	5600K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	170 °C
Max. Ambient Temp.	45 °C
Min. Dis. to Illuminated Object	10 m / 8 m
Min. Dis. to Flammable Object	1.2 m / 1 m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	30.6 kg

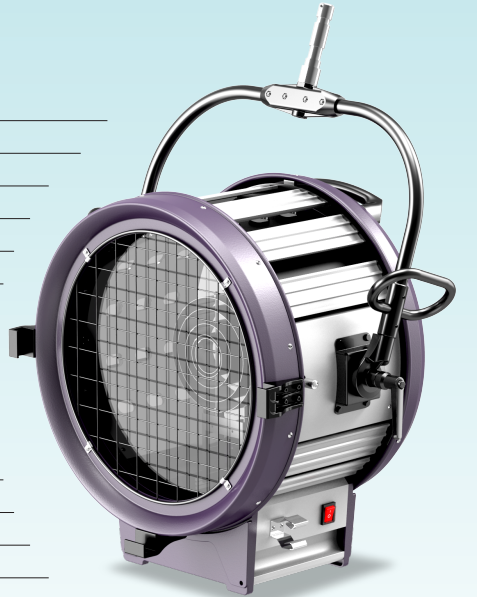

L04025DPBJ


LAMPHEAD CONTENTS

Lamp Housing with

- High Reflective Parabolic Glass Mirror
- Inlet Cable with Multi-Pin Connector
- Stirrup with Ø28mm Spigot


Exclude Lamp Bulb

PHOTOMETRIC DATA

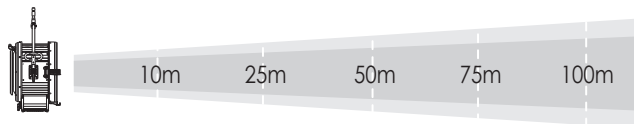


4kW						
Spot	Lux	182000	29120	7280	3236	1820
	Beam Ø	0.49m	0.49m	0.49m	0.49m	0.49m
Flood	Lux	17100	2736	684	304	171
	Beam Ø	2.63 m	6.58 m	13.17 m	19.75 m	26.33 m


ACCESSORIES



Electronic Ballast
4kW / 2.5kW



Head to Ballast Cable
(7m or 15m)



Ø624 Scrim with Bag



Transport Case

DIMENSIONS (mm)

