



Image 300c (25°-50°)

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm Spigot
- Set of 4 Cutters
- AC Cable

PHOTOMETRIC DATA

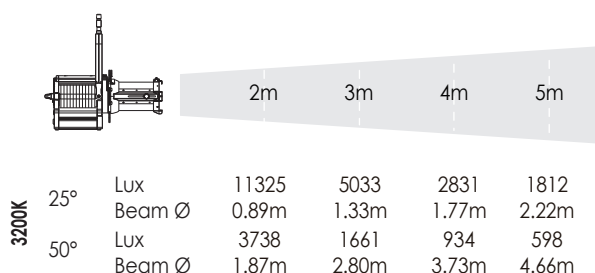


IMAGE 300C (25°-50°)

SPECIFICATIONS

Identity No.	L302550PZC (25°-50°)
Max. Capacity	300W
Voltage	100 - 240V AC / 22-36V DC
Current	1.4A@ 220V AC / 12.5A@ 24V DC
Color Temp. Range	2700K ~ 10000K
Color	R/G/B/W color mixing
CRI	Average >95
TLCI	Average >90
Beam Angle	25°-50°
Dimming Range	0-100%
Control Signal	DMX / RDM
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
DMX Channel	Varied (depends on DMX mode selection)
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	15.5kg
Weight (Lamphead)	12kg

ACCESSORIES

Hook Clamp

Iris

Gobo Adapter

Safety Cable (for lamphead)

Bluetooth Remote Control

DIMENSIONS (mm)

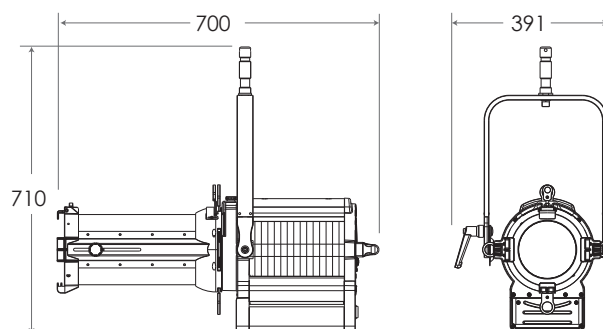





Image 300B

(25°-50°)

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- AC Cable

PHOTOMETRIC DATA

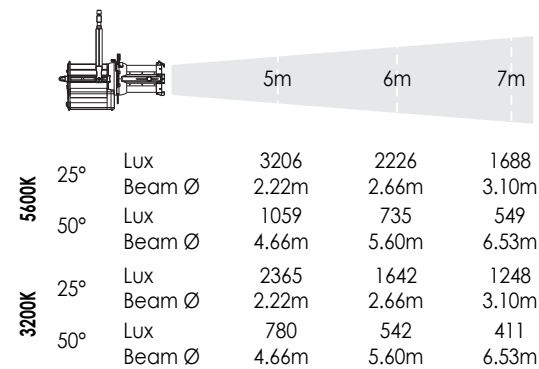

SPECTRUM

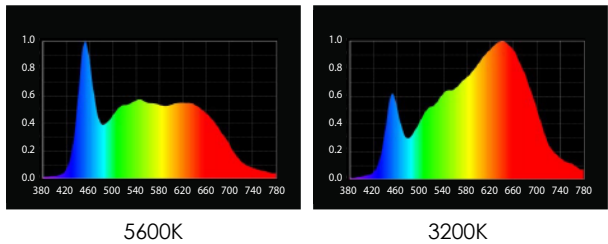


IMAGE 300B (25°-50°)

SPECIFICATIONS

Identity No.	L302550PZB
Max. Capacity	300W
Voltage	100 - 240V AC 50Hz / 60Hz
	22 - 36V DC
Current	1.4A @220V AC
	12.5A @24V DC
Color Temp. Range	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Beam Angle	25°-50°
Dimming Range	0-100%
Control Signal	DMX 512
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
DMX Channel	3 or 5
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	12kg
Weight (Lamphead)	8.5kg

ACCESSORIES

Hook Clamp


Iris

Gobo Adapter

Safety Cable (for lamphead)

* Pole Operated Optional

DIMENSIONS (mm)

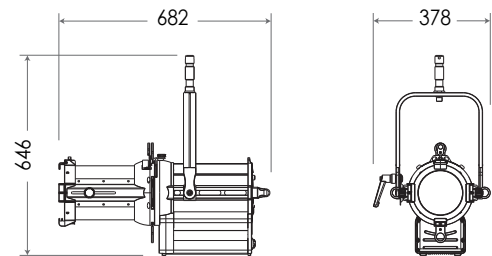

HISTOGRAM

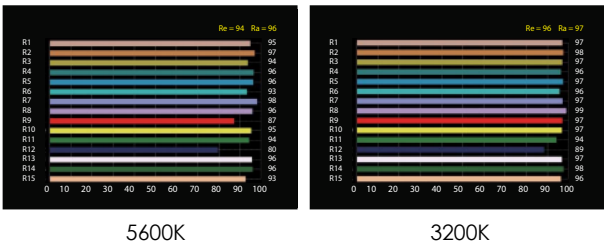




Image 300c (16°-28°)

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm Spigot
- Set of 4 Cutters
- AC Cable

PHOTOMETRIC DATA

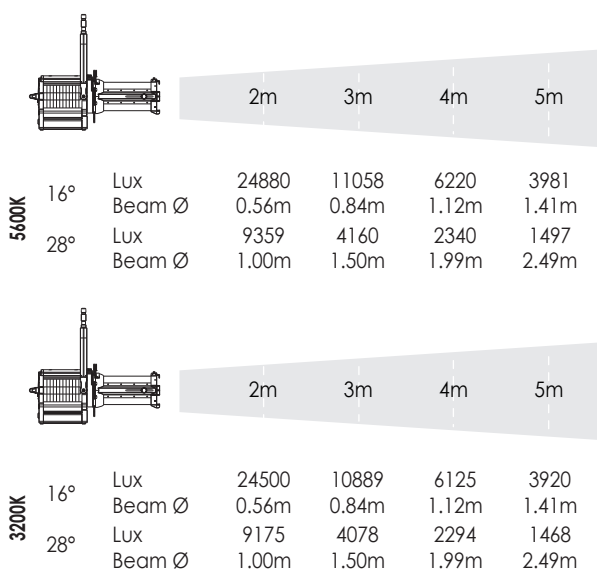


IMAGE 300C (16°-28°)

SPECIFICATIONS

Identity No.	L301628PZC (16°-28°)
Max. Capacity	300W
Voltage	100 - 240V AC / 22-36V DC
Current	1.4A@ 220V AC / 12.5A@ 24V DC
Color Temp. Range	2700K ~ 10000K
Color	R/G/B/W color mixing
CRI	Average >95
TLCI	Average >90
Beam Angle	16°-28°
Dimming Range	0-100%
Control Signal	DMX / RDM
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
DMX Channel	Varied (depends on DMX mode selection)
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	16.5kg
Weight (Lamphead)	12kg

ACCESSORIES

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead)
- Bluetooth Remote Control

DIMENSIONS (mm)

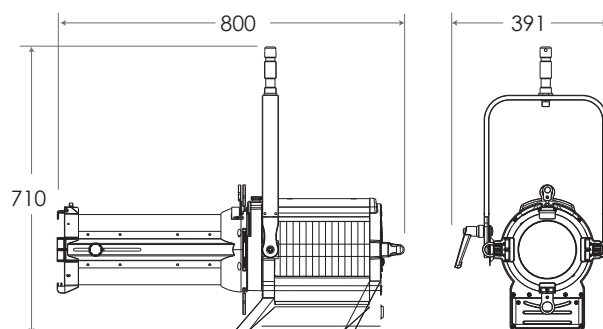





Image 300B

(16°-28°)

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- AC Cable

PHOTOMETRIC DATA

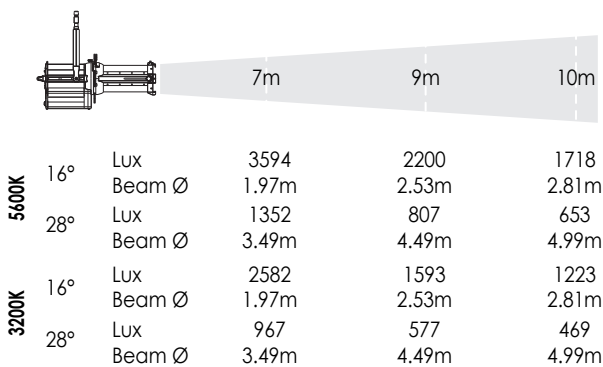

SPECTRUM

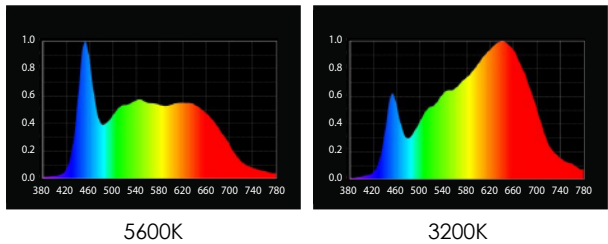


IMAGE 300B (16°-28°)


SPECIFICATIONS

Identity No.	L301628PZB
Max. Capacity	300W
Voltage	100 - 240V AC 50Hz / 60Hz
	22 - 36V DC
Current	1.4A @220V AC
	12.5A @24V DC
Color Temp. Range	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Beam Angle	16°-28°
Dimming Range	0-100%
Control Signal	DMX 512
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
DMX Channel	3 or 5
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	13kg
Weight (Lamphead)	8.5kg

ACCESSORIES

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead) * Pole Operated Optional

DIMENSIONS (mm)

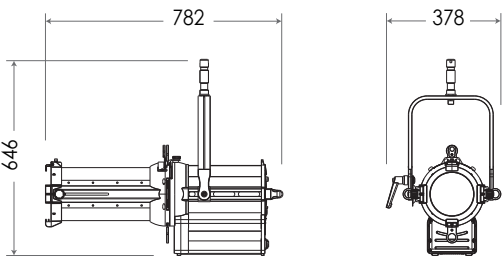

HISTOGRAM

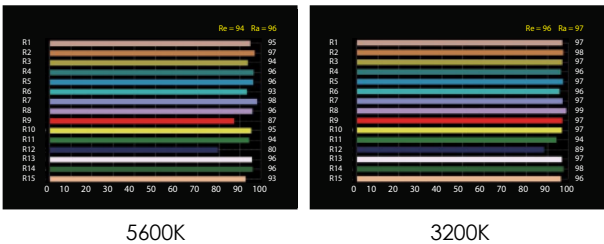





Image 300B

(50°)

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- AC Cable

PHOTOMETRIC DATA

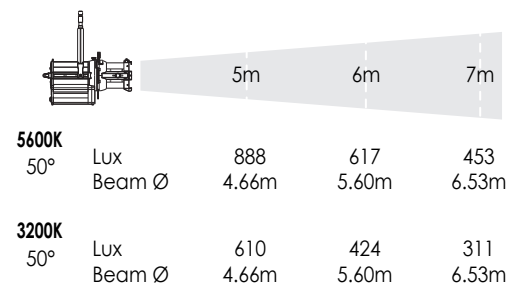

SPECTRUM

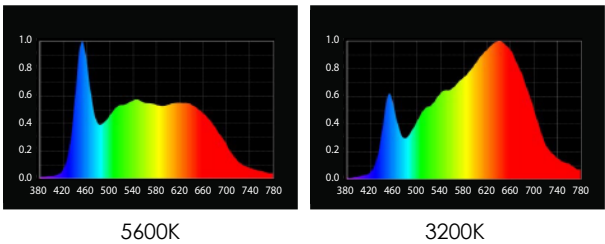


IMAGE 300B (50°)


SPECIFICATIONS

Identity No.	L300050PAB
Max. Capacity	300W
Voltage	100 - 240V AC 50Hz / 60Hz
	22 - 36V DC
Current	1.4A @220V AC
	12.5A @24V DC
Color Temp. Range	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Beam Angle	50°
Dimming Range	0-100%
Control Signal	DMX 512
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
DMX Channel	3 or 5
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	12kg
Weight (Lamphead)	8.5kg

ACCESSORIES

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead) * Pole Operated Optional

DIMENSIONS (mm)

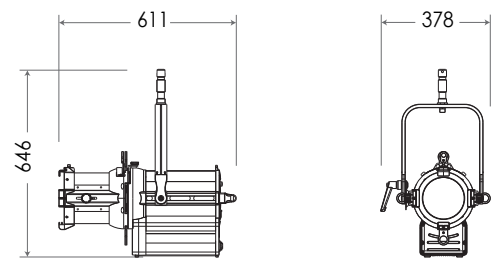

HISTOGRAM

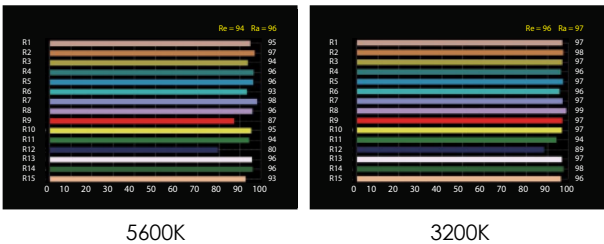





Image 300B

(36°)

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- AC Cable

PHOTOMETRIC DATA

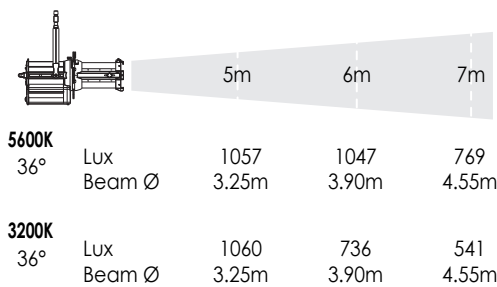

SPECTRUM

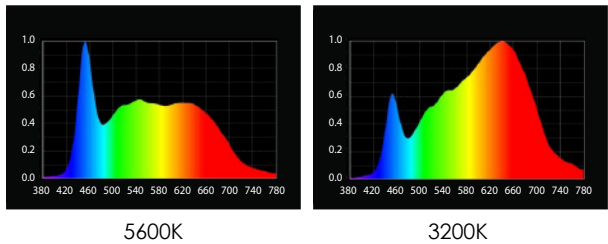


IMAGE 300B (36°)


SPECIFICATIONS

Identity No.	L300036PAB
Max. Capacity	300W
Voltage	100 - 240V AC 50Hz / 60Hz
	22 - 36V DC
Current	1.4A @220V AC
	12.5A @24V DC
Color Temp. Range	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Beam Angle	36°
Dimming Range	0-100%
Control Signal	DMX 512
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
DMX Channel	3 or 5
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	12.5kg
Weight (Lamphead)	8.5kg

ACCESSORIES

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead) * Pole Operated Optional

DIMENSIONS (mm)

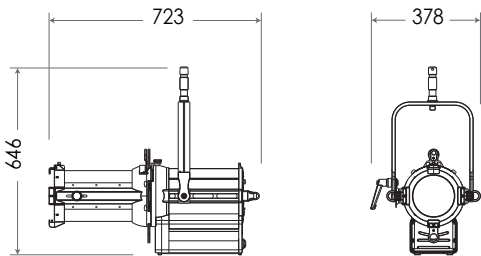

HISTOGRAM

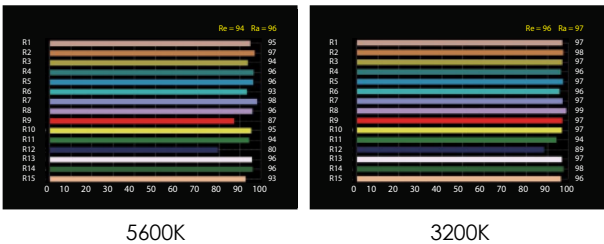





Image 300B

(26°)

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- AC Cable

PHOTOMETRIC DATA



5600K 26°	Lux	Beam Ø	1447	876	709
			3.23m	4.16m	4.62m
3200K 26°	Lux	Beam Ø	976	590	478
			3.23m	4.16m	4.62m

SPECTRUM

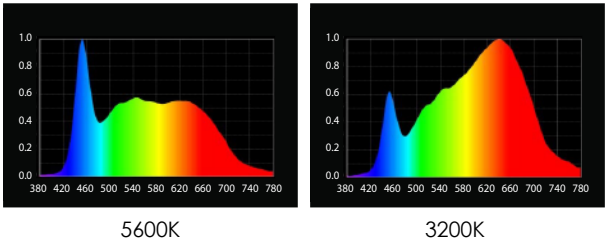


IMAGE 300B (26°)


SPECIFICATIONS

Identity No.	L300026PAB
Max. Capacity	300W
Voltage	100 - 240V AC 50Hz / 60Hz
	22 - 36V DC
Current	1.4A @220V AC
	12.5A @24V DC
Color Temp. Range	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Beam Angle	26°
Dimming Range	0-100%
Control Signal	DMX 512
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
DMX Channel	3 or 5
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	13kg
Weight (Lamphead)	8.5kg

ACCESSORIES

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead) * Pole Operated Optional

DIMENSIONS (mm)

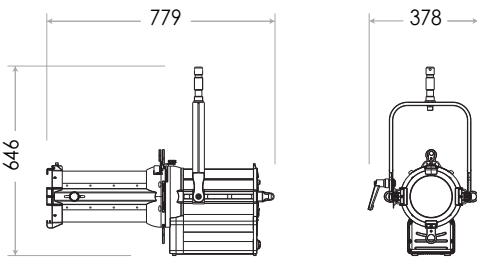

HISTOGRAM

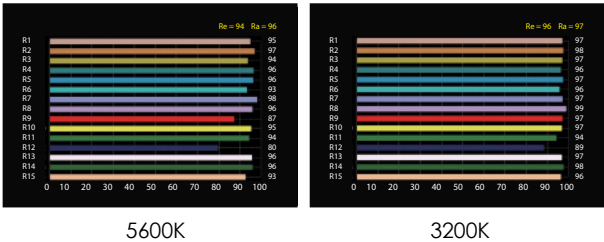





Image 300B

(19°)

LAMPHEAD CONTENTS

- Lamp Housing
- Barrel
- Stirrup with Ø28mm (1-1/8 in.) Spigot
- Set of 4 Cutters
- AC Cable

PHOTOMETRIC DATA

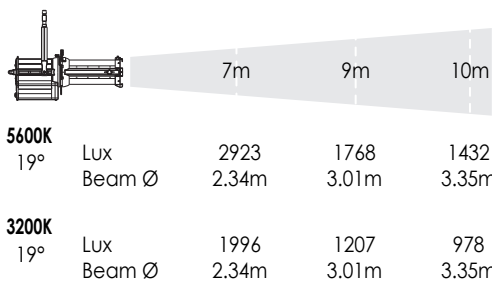

SPECTRUM

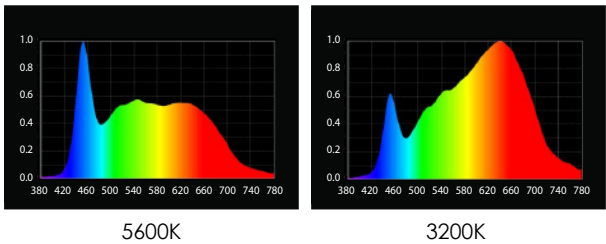


IMAGE 300B (19°)


SPECIFICATIONS

Identity No.	L300019PAB
Max. Capacity	300W
Voltage	100 - 240V AC 50Hz / 60Hz
	22 - 36V DC
Current	1.4A @220V AC
	12.5A @24V DC
Color Temp. Range	2700K - 6000K
CRI	Average >95
TLCI	Average >95
Beam Angle	19°
Dimming Range	0-100%
Control Signal	DMX 512
Communication	DMX XLR-5, CRMX (LumenRadio), Bluetooth, Ethernet, USB A
DMX Channel	3 or 5
LED Lifetime	30,000 Hrs (Estimated)
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	60°C
Max. Ambient Temp.	45°C
Operation Range	+45° ~ 0° ~ -45°
Weight (with Barrel)	13.5kg
Weight (Lamphead)	8.5kg

ACCESSORIES

- Hook Clamp
- Iris
- Gobo Adapter
- Safety Cable (for lamphead) * Pole Operated Optional

DIMENSIONS (mm)

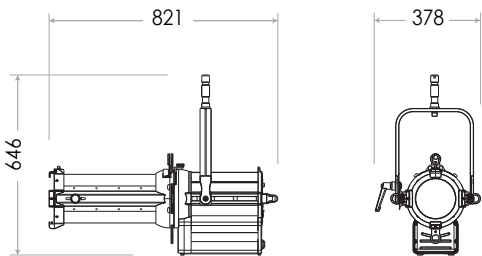

HISTOGRAM

