



Tungsten Fresnel 24kW/20kW Studio


LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø625mm (24-5/8 in.) Fresnel Lens
- Inlet Cable 2.5m (8.2 ft.) *
- Stirrup with Ø28mm (1-1/8 in.) Spigot

* No switch (Rotary or Panel switch on request)

Requires Lamp Bulb

DIMENSIONS (mm)

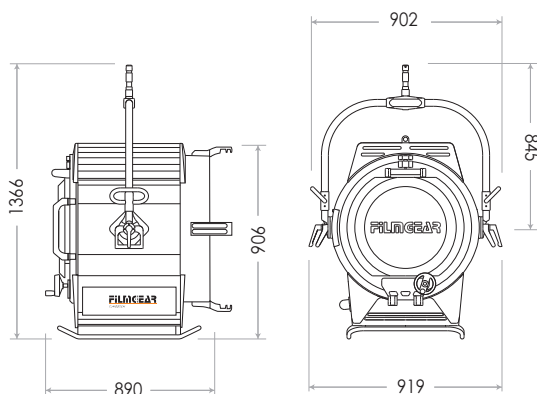

Tungsten Fresnel 24kW/20kW Studio

SPECIFICATIONS

Identity No.	L24020TF
Capacity	24,000W / 20,000W
Voltage	200 - 240V AC
Fresnel Lens	Ø625mm (24-5/8 in.)
Lamp Type	24kW/20kW SE
Color Temp.	3200K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	240 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	12m
Min. Distance to Flammable Object	2.5m
Operating Range	+30° ~ 0° ~ -30°
Weight (lamphead)	63kg
Weight (with barndoor)	69.5kg

ACCESSORIES

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø736mm (29 in.) :

Full Single, Full Double, Half Single, Half Double

Scrim Bag

Safety Cable (for lamphead)

Safety Wire (for barndoor)

24kW Electronic Dimmer with cable (only for TF 24kW/20kW)

PHOTOMETRIC DATA

 24000W Studio			
	10m	15m	20m
Spot (13°)			
Lux	46763	20784	11691
Beam Ø	2.28 m	3.42 m	4.56 m
Flood (56°)			
Lux	8019	3564	2005
Beam Ø	10.63 m	15.95 m	21.27 m




Tungsten Fresnel 12kW/10kW Studio

LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø450mm (17-3/4 in.) Fresnel Lens
- Panel Switch
- Inlet Cable 4m (13 ft.)
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

DIMENSIONS (mm)

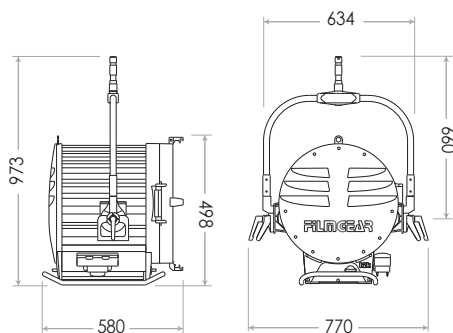

Tungsten Fresnel 12kW/10kW Studio

SPECIFICATIONS

Identity No.	L12010TF
Capacity	12,000W / 10,000W
Voltage	200 - 240V AC
Fresnel Lens	Ø450mm (17-3/4 in.)
Lamp Type	12kW/10kW SE
Color Temp.	3200K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	220 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	8m
Min. Distance to Flammable Object	2m
Operating Range	+30° ~ 0° ~ -30°
Weight (lamphead)	34kg
Weight (with barndoor)	38.9kg

ACCESSORIES

4-leaf Rotatable Barndoor

Set of 4 Scrims Ø533mm (21 in.) :

Full Single, Full Double, Half Single, Half Double



Scrim Bag

Spill Ring

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

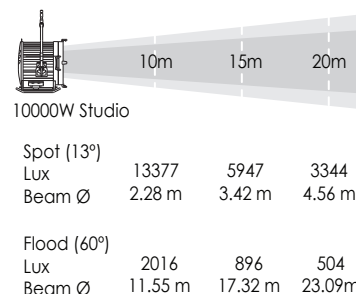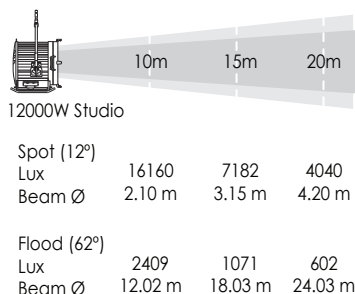




Tungsten Fresnel 2000W Studio

LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø250mm (9-7/8 in.) Fresnel Lens
- Panel Switch
- Inlet Cable 4m (13 ft.)
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

DIMENSIONS (mm)

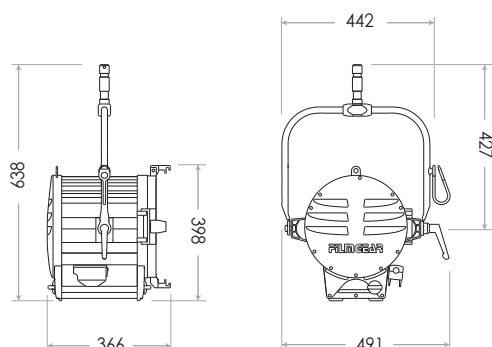

Tungsten Fresnel 2000W Studio

SPECIFICATIONS

Identity No.	L02000TF
Capacity	2,000W
Voltage	100 - 250V AC
Fresnel Lens	Ø250mm (9-7/8 in.)
Lamp Type	2000W SE
Color Temp.	3200K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	2m
Min. Distance to Flammable Object	1m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	12.2kg
Weight (with barndoor)	13.9kg

ACCESSORIES

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø330mm (13 in.) :

Full Single, Full Double, Half Single, Half Double

Scrim Bag


Variable Snoot

Spill Ring

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

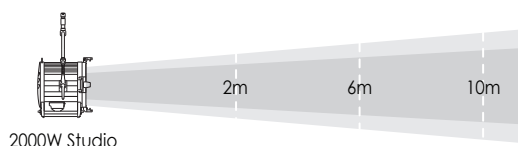

2000W Studio

Spot (9°)			
Lux	95319	10591	3813
Beam Ø	0.31 m	0.94 m	1.57 m
Flood (52°)			
Lux	10933	1215	437
Beam Ø	1.95 m	5.85 m	9.75 m




Tungsten Fresnel 2000W Junior

LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø175mm (6-7/8 in.) Fresnel Lens
- Panel Switch
- Inlet Cable 4m (13 ft.)
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

DIMENSIONS (mm)

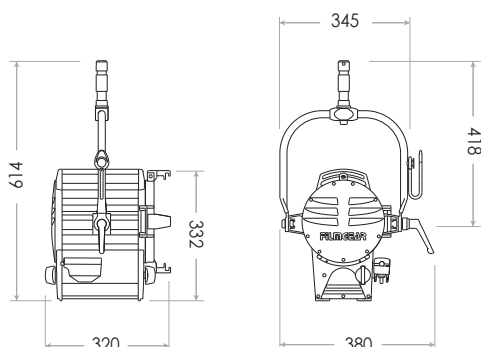

Tungsten Fresnel 2000W Junior

SPECIFICATIONS

Identity No.	L02000TJ
Capacity	2,000W
Voltage	100 - 250V AC
Fresnel Lens	Ø175mm (6-7/8 in.)
Lamp Type	2000W SE
Color Temp.	3200K
Lamp Holder	G38
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 20
Max. Surface Temp.	220 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	2m
Min. Distance to Flammable Object	1m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	8.8kg
Weight (with barndoor)	9.8kg

ACCESSORIES

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø229mm (9 in.) :

Full Single, Full Double, Half Single, Half Double

Scrim Bag


Variable Snoot

Spill Ring

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

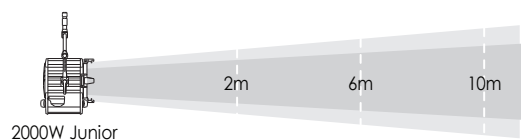

2000W Junior

Spot (10°)			
Lux	54414	6046	2177
Beam Ø	0.35 m	1.05 m	1.75 m
Flood (56°)			
Lux	8156	906	326
Beam Ø	2.17 m	6.38 m	10.63 m




Tungsten Fresnel 1000W Studio

LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø175mm (6-7/8 in.) Fresnel Lens
- Panel Switch
- Inlet Cable 4m (13 ft.)
- Stirrup with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

DIMENSIONS (mm)

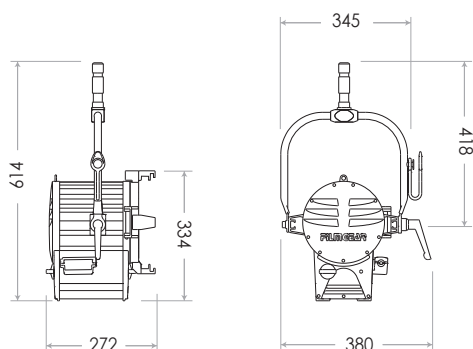

Tungsten Fresnel 1000W Studio

SPECIFICATIONS

Identity No.	L01000TF
Capacity	1,000W
Voltage	100 - 250V AC
Fresnel Lens	Ø175mm (6-7/8 in.)
Lamp Type	1000W SE
Color Temp.	3200K
Lamp Holder	G22
Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	1.5m
Min. Distance to Flammable Object	0.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	6.5kg
Weight (with barndoor)	7.5kg

ACCESSORIES

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø229mm (9 in.) :

Full Single, Full Double, Half Single, Half Double

Scrim Bag


Variable Snoot

Spill Ring

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

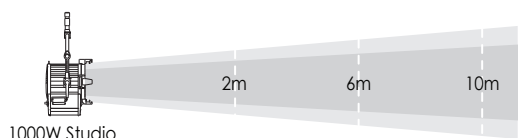

1000W Studio

Spot (8°)			
Lux	38708	4301	1548
Beam Ø	0.28 m	0.84 m	1.40 m
Flood (55°)			
Lux	4644	516	186
Beam Ø	2.08 m	6.24 m	10.41 m




Tungsten Fresnel 1000W Junior

LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø130mm (5-1/8 in.) Fresnel Lens
- In-Line Switch
- Inlet Cable 4m (13 ft.)
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Lamp Bulb

DIMENSIONS (mm)

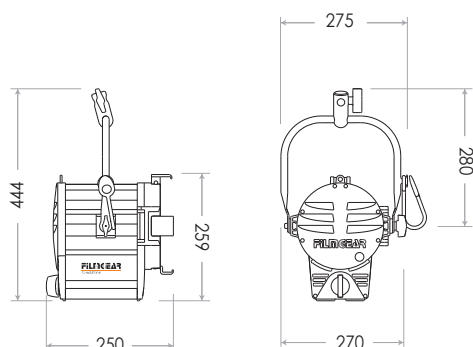

Tungsten Fresnel 1000W Junior

SPECIFICATIONS

Identity No.	L01000TJ
Capacity	1,000W
Voltage	100 - 250V AC
Fresnel Lens	Ø130mm (5-1/8 in.)
Lamp Type	1000W SE
Color Temp.	3200K
Lamp Holder	G22
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	220 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	1.5m
Min. Distance to Flammable Object	0.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	4.3kg
Weight (with barndoor)	4.9kg

ACCESSORIES

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø197mm (7-3/4 in.) :

Full Single, Full Double, Half Single, Half Double

Scrim Bag


Variable Snoot

Spill Ring

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA



1000W Junior

Spot (10°)

Lux

Beam Ø

30805

0.35 m

3423

1.05 m

1232

1.75 m

Flood (57°)

Lux

Beam Ø

4621

2.17 m

513

6.52 m

185

10.86 m




Tungsten Fresnel 650W Junior

LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø112mm (4-3/8 in.) Fresnel Lens
- In-Line Switch
- Inlet Cable 4m (13 ft.)
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Lamp Bulb

DIMENSIONS (mm)

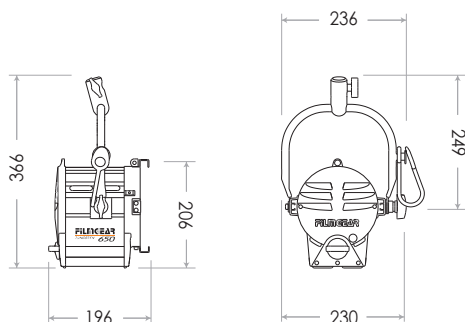

Tungsten Fresnel 650W Junior

SPECIFICATIONS

Identity No.	L00650TJ
Capacity	650W
Voltage	100 - 250V AC
Fresnel Lens	Ø112mm (4-3/8 in.)
Lamp Type	650W SE
Color Temp.	3200K
Lamp Holder	GY9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	1m
Min. Distance to Flammable Object	0.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	3kg
Weight (with barndoor)	3.5kg

ACCESSORIES

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø168mm (6-5/8 in.) :

Full Single, Full Double, Half Single, Half Double

Scrim Bag


Variable Snoot

Spill Ring

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA



650W Junior

Spot (11°)

Lux

Beam Ø

17498

0.39 m

1944

1.16 m

700

1.93 m

Flood (54°)

Lux

Beam Ø

3232

2.04 m

359

6.11 m

129

10.19 m




Tungsten Fresnel 300W Junior

LAMPHEAD CONTENTS

- Lamp Housing without Bulb # (purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø80mm (3-1/8 in.) Fresnel Lens
- In-Line Switch
- Inlet Cable 4m (13 ft.)
- Stirrup with Ø16mm (5/8 in.) Socket

Requires Lamp Bulb

DIMENSIONS (mm)

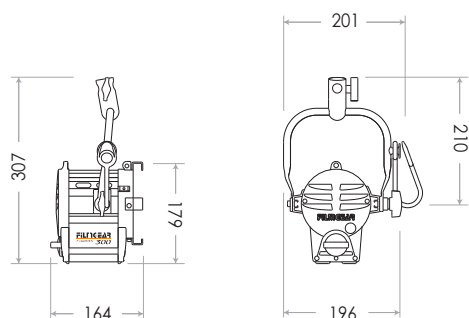

Tungsten Fresnel 300W Junior

SPECIFICATIONS

Identity No.	L00300TJ
Capacity	300W
Voltage	100 - 250V AC
Fresnel Lens	Ø80mm (3-1/8 in.)
Lamp Type	300W SE
Color Temp.	3200K
Lamp Holder	GY9.5
Stirrup	Ø16mm (5/8 in.) Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	1m
Min. Distance to Flammable Object	0.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	1.8kg
Weight (with barndoor)	2.1kg

ACCESSORIES

4-leaf Rotatable Barndoor

Filter Frame

Set of 4 Scrims Ø127mm (5 in.) :

Full Single, Full Double, Half Single, Half Double


Scrim Bag

Variable Snoot

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA



300W Junior

Spot (13°)			
Lux	4469	497	179
Beam Ø	0.46 m	1.37 m	2.28 m
Flood (54°)			
Lux	985	109	39
Beam Ø	2.04 m	6.11 m	10.19 m




Tungsten Fresnel 5000W Studio P.O.

LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø300mm (11-3/4 in.) Fresnel Lens
- Inlet Cable 4m (13 ft.)
- Pole Operated Stirrup
with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

DIMENSIONS (mm)

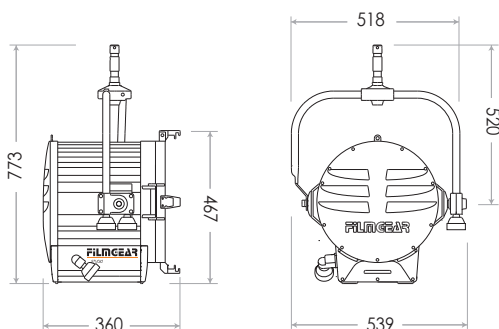

Tungsten Fresnel 5000W Studio P.O.


SPECIFICATIONS

Identity No.	LN5000TF (220V)
	LN5000TF1 (110V)
Capacity	5,000W
Voltage	200 - 240V AC or 100 - 120V AC
Fresnel Lens	Ø300mm (11-3/4 in.)
Lamp Type	5000W SE
Color Temp.	3200K
Lamp Holder	G38
P.O. Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	210 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	5m
Min. Distance to Flammable Object	1.5m
Operating Range	+38° ~ 0° ~ -38°
Weight (lamphead)	18.1kg
Weight (with barndoor)	20.6kg

ACCESSORIES

- 4-leaf Rotatable Barndoor
- Rotary Switch
- Filter Frame
- Set of 4 Scrims Ø394mm (15-1/2 in.) :
Full Single, Full Double, Half Single, Half Double
- Scrim Bag
- Variable Snoot
- Spill Ring
- Safety Cable (for lamphead)
- Safety Wire (for barndoor)

PHOTOMETRIC DATA

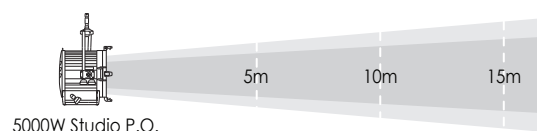

5000W Studio P.O.

Spot (12°)			
Lux	19493	4873	2166
Beam Ø	1.05 m	2.10 m	3.15 m
Flood (64°)			
Lux	2969	742	330
Beam Ø	6.25 m	12.50 m	18.75 m




Tungsten Fresnel 2000W Studio P.O.

LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø250mm (9-7/8 in.) Fresnel Lens
- Inlet Cable 4m (13 ft.)
- Pole Operated Stirrup
with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

DIMENSIONS (mm)

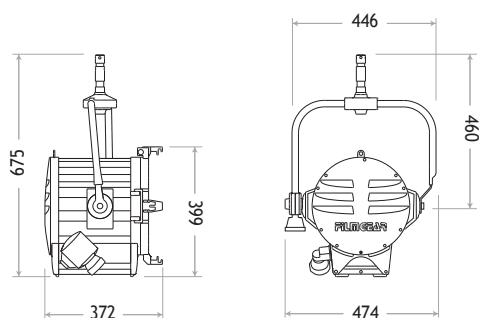

Tungsten Fresnel 2000W Studio P.O.

SPECIFICATIONS

Identity No.	LN2000TF
Capacity	2,000W
Voltage	100 - 250V AC
Fresnel Lens	Ø250mm (9-7/8 in.)
Lamp Type	2000W SE
Color Temp.	3200K
Lamp Holder	G38
P.O. Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	2m
Min. Distance to Flammable Object	1m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	14.1kg
Weight (with barndoor)	15.8kg

ACCESSORIES

4-leaf Rotatable Barndoor

Rotary Switch

Filter Frame

Set of 4 Scrims Ø330mm (13 in.) :

Full Single, Full Double, Half Single, Half Double

Scrim Bag


Variable Snoot

Spill Ring

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

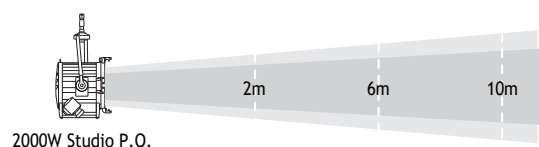

2000W Studio P.O.

Spot (9°)			
Lux	95319	10591	3813
Beam Ø	0.31 m	0.94 m	1.57 m
Flood (52°)			
Lux	10933	1215	437
Beam Ø	1.95 m	5.85 m	9.75 m




Tungsten Fresnel 1000W Studio P.O.

LAMPHEAD CONTENTS

- Lamp Housing without Bulb #
(purple grey & silver color)
- 4-leaf Rotatable Barndoor with Safety Wire
- Ø175mm (6-7/8 in.) Fresnel Lens
- Inlet Cable 4m (13 ft.)
- Pole Operated Stirrup
with Ø28mm (1-1/8 in.) Spigot

Requires Lamp Bulb

DIMENSIONS (mm)

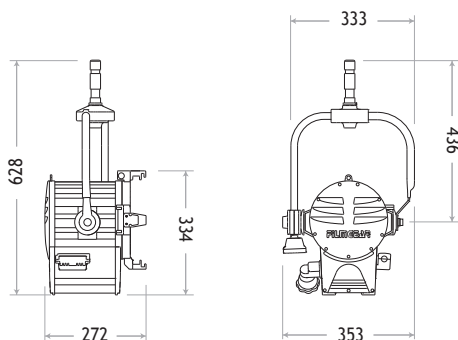

Tungsten Fresnel 1000W Studio P.O.

SPECIFICATIONS

Identity No.	LN1000TF
Capacity	1,000W
Voltage	100 - 250V AC
Fresnel Lens	Ø175mm (6-7/8 in.)
Lamp Type	1000W SE
Color Temp.	3200K
Lamp Holder	G22
P.O. Stirrup	Ø28mm (1-1/8 in.) Spigot
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	1.5m
Min. Distance to Flammable Object	0.5m
Operating Range	+45° ~ 0° ~ -45°
Weight (lamphead)	8.1kg
Weight (with barndoor)	9.1kg

ACCESSORIES

4-leaf Rotatable Barndoor

Rotary Switch

Filter Frame

Set of 4 Scrims Ø229mm (9 in.) :

Full Single, Full Double, Half Single, Half Double

Scrim Bag


Variable Snoot

Spill Ring

Safety Cable (for lamphead)

Safety Wire (for barndoor)

PHOTOMETRIC DATA

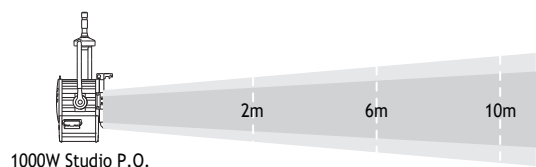

Spot (8°)			
Lux	38708	4301	1548
Beam Ø	0.28 m	0.84 m	1.40 m
Flood (55°)			
Lux	4644	516	186
Beam Ø	2.08 m	6.24 m	10.41 m

Traveler S4 Kit

KIT CONTENTS

- (1) Cinelite 1000W or 800W Lamphead
- (1) 4-leaf Rotatable Barndoor
- (1) Set of 4 Scrims Ø191mm with Bag
- (1) Lamp Bulb 1000W 120V or 800W 230V
- (1) Softbox with T-ring
- (1) Aluminum Light Stand

- (2) Tungsten Fresnel 650W Junior Lamphead
- (2) 4-leaf Rotatable Barndoor
- (2) Set of 4 Scrims Ø168mm with Bag
- (2) Filter Frame
- (2) Lamp Bulb 650W 120V or 650W 230V
- (2) Aluminum Light Stand

- (1) Tungsten Fresnel 300W Junior Lamphead
- (1) 4-leaf Rotatable Barndoor
- (1) Set of 4 Scrims Ø127mm with Bag
- (1) Filter Frame
- (1) Lamp Bulb 300W 120V or 300W 230V
- (1) Aluminum Light Stand

- (1) Accessory Pack
- (1) ABS Case with Wheels (39" x 19" x 15.5")

Total Weight : 36.0 kg



Traveler S4 Kit

Identity No. KTS402TA (220V) / KTS401TA (110V)

Traveler S3 Kit

■ KIT CONTENTS

(1) Cinelite 1000W or 800W Lamphead
 (1) 4-leaf Rotatable Barndoor
 (1) Set of 4 Scrims Ø191mm with Bag
 (1) Lamp Bulb 1000W 120V or 800W 230V
 (1) Softbox with T-ring
 (1) Aluminum Light Stand

(1) Tungsten Fresnel 650W Junior Lamphead
 (1) 4-leaf Rotatable Barndoor
 (1) Set of 4 Scrims Ø168mm with Bag
 (1) Filter Frame
 (1) Lamp Bulb 650W 120V or 650W 230V
 (1) Aluminum Light Stand

(1) Tungsten Fresnel 300W Junior Lamphead
 (1) 4-leaf Rotatable Barndoor
 (1) Set of 4 Scrims Ø127mm with Bag
 (1) Filter Frame
 (1) Lamp Bulb 300W 120V or 300W 230V
 (1) Aluminum Light Stand

(1) Accessory Pack
 (1) ABS Case with Wheels (31" x 14.5" x 17")

Total Weight : 25.5 kg



Traveler S3 Kit

Identity No. KTS302TA (220V) / KTS301TA (110V)